


**Model**

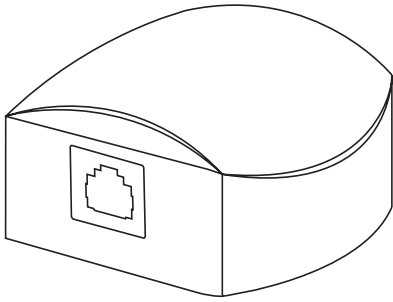

**Start-Up**

1. Connect the analog telephone jack (slot N in Germany) with the transmitter RTS41.  
**Attention!** Make sure there is no interference with the wireless connection. Do not mount the device in a distribution box, in metal casings, in direct proximity to large metal objects, on the floor or close to it.
2. Teach the RTS41 into a receiver (not contained in the delivery). Put the receiver into teach-in mode according to the operating manual of the receiver.
3. Now call your telephone. Once you receive the call, the RTS41 sends a radio telegram to the receiver and is thus programmed.
4. Terminate the teach-in mode of the receiver according to the operating manual of the receiver.
5. Now test the function of the transmitter RTS41 with the receiver by calling your telephone number again.

**RTS41E5001-01**

**Technical Details**

Frequency:	868.3 MHz
Modulation:	FSK
Coding:	Easywave
Power supply:	via telephone jack
Current parameter:	1TR 110-1
Rining frequency:	25 Hz and 50 Hz
Range:	up to 150 m under open field conditions
Degree of protection:	IP20
Operating temperature:	0 °C to +60 °C
Dimensions:	70/64/35 mm
Weight:	32.0 g

**Scope of Delivery**

Wall-mounted transmitter RTS41, connecting cable RJ11/RJ11, adapter TAE-N/RJ11, attachment material, operating instructions

**Intended Use**

The Wall-mounted transmitter RTS41 may only be used to operate Easywave radio receivers. The manufacturer shall not be liable for any damage caused by improper or non-intended use.

**Safety Advice**



Before using the device, carefully read through the operating instructions

Note also the operating instructions of the radio receiver.


Have faulty radio controls checked by the manufacturer!

Do not make any unauthorized alterations or modifications to the transmitter!

**Function**

The stationary transmitter RTS41 serves to forward an analog telephone call to an external Easywave receiver, e.g. RCP04, RCP09 or RCJ01, etc.

In case of an incoming call, the RTS41 forwards a radio signal to the call receiver.

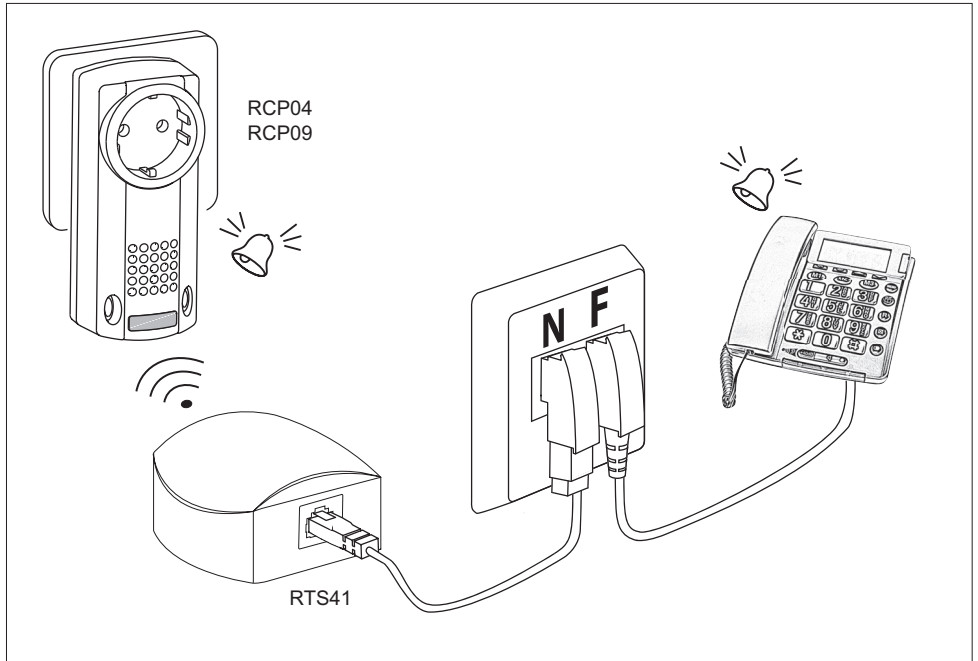

**General Information**

**Disposal**

**Waste electrical products and batteries not be disposed of with household waste!**

Dispose of the waste product via a collection point for electronic scrap or via your specialist dealer.

Put the packaging material into the recycling bins for cardboard, paper and plastics.



**Warranty**

Within the statutory warranty period we undertake to rectify free of charge by repair or replacement any product defects arising from material or production faults.

Any unauthorized tampering with, or modifications to, the product shall render this warranty null and void.

**Conformity**

This product conforms to the basic requirements of the R&TTE Directive 1999/5/EC.

For use in: EU/CH/FL/IS/N

The Declaration of Conformity can be found on the Internet at: [www.eldat.de](http://www.eldat.de).



**Service**

If, despite correct handling, faults or malfunctions occur or if the product was damaged, please contact your retailer or the manufacturer:

**ELDAT GmbH**

Im Gewerbepark 14  
15711 Königs Wusterhausen  
Germany  
Phone: + 49 (0) 33 75 / 90 37-310  
Telefax: + 49 (0) 33 75 / 90 37-90  
Internet: [www.eldat.de](http://www.eldat.de)  
E-mail: [info@eldat.de](mailto:info@eldat.de)