



Dé PBX met **rijke functionaliteit**
tegen een **aantrekkelijke prijs**



Op zoek naar een
betaalbare, kwalitatief
goede en **veelzijdige**
telefooncentrale?
Yeastar heeft
de oplossing!

INHOUD

3	De voordelen op een rij	15	NeoGate TB Series
5	MyPBX Series	16	NeoGate TE Series
11	MyPBX Addons	17	NeoGate TG Series
13	MyPBX Specificaties	18	NeoGate TA Series
14	MyPBX Voorbeelden		

De MyPBX serie telefooncentrales van Yeastar bieden uitgebreide functionaliteit tegen een aantrekkelijk prijs. De producten van Yeastar zijn modulair opgebouwd en daarom inzetbaar in zowel kleine bedrijven als grote organisaties. Door de hybride constructie kan de telefooncentrale worden gekoppeld met analoge, ISDN, GSM/UMTS of VoIP verbindingen.


MyPBX[®]

De voordelen op een rij

MyPBX®

- + **Eenvoudig te beheren**
De installatie en het beheer zijn eenvoudig uit te voeren via de webinterface
- + **Modulair systeem**
Door modules eenvoudig te koppelen met analoge, ISDN, GSM/UMTS of VoIP verbindingen
- + **Schaalbaar**
Eenvoudig te koppelen en als redundant systeem te gebruiken (Enterprise & U-series)
- + **IP telefoons**
Te koppelen met alle gangbare SIP telefoons
- + **Meertalig**
Webinterface en audio's in het Nederlands, Engels, Duits en Frans
- + **Geen licentiekosten**
Eenmalige aanschaf, zonder verdere licentiekosten

Aantal gebruikers

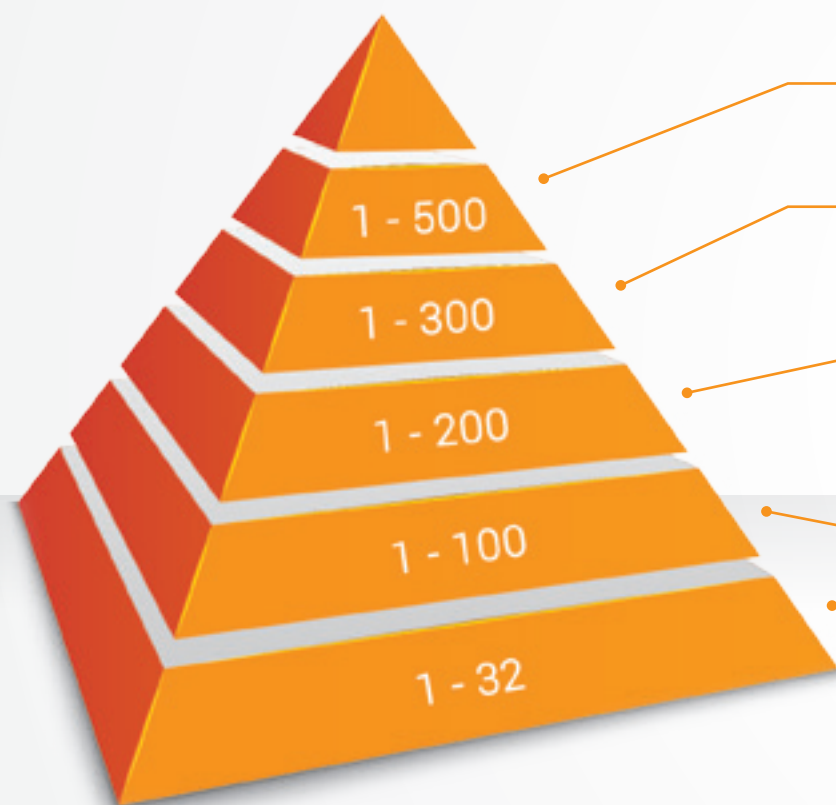

3 jaar garantie op alle systemen

MyPBX[®] SOHO



De MyPBX SOHO is de volwaardige telefooncentrale voor kleine bedrijven en thuishantoren, welke beschikt over hybrid technologie (VoIP/ISDN/Analoog). Daarmee is de PBX geschikt voor vele toepassingen zoals bedrijven met meerdere locaties, thuiswerkers en bedrijven tot wel 32 gebruikers. Tevens is de MyPBX bruikbaar met conventionele als moderne technieken.

MyPBX[®] STANDARD




De MyPBX Standard is de volwaardige telefooncentrale voor het MKB, welke beschikt over hybrid technologie (VoIP/ISDN/Analoog/GSM/UMTS). Daarmee is de PBX geschikt voor vele toepassingen zoals bedrijven met meerdere locaties, thuiswerkers en bedrijven tot wel 100 gebruikers. Tevens is de MyPBX bruikbaar met conventionele als moderne technieken.

Specificaties

- | | | |
|---|---|---|
| <ul style="list-style-type: none"> • Users: 32 • Concurrent Calls (Max): 15 • Voicemail: 4000 min • Interface: Up to 4 Analog Ports (FXO/FXS); Up to 4 BRI Ports • LAN: 1 (10/100Mbps) • Size: 193x153x30mm • Weight: 500g • Power: DC 12V, 1A MAX • Protocol: SIP (RFC3261), IAX2 | <ul style="list-style-type: none"> • Transport Protocol: UDP, TCP, TLS, SRTP • Audio Codec: G.711 (alaw/ulaw), G.722, G.723.1, G.726, G.729A, GSM, SPEEX, ADPCM • Video Codec: H.263, H.263P, H.264, MPEG4 • DTMF: Inband, RFC2833, SIP INFO • Network: Firewall, VLAN, DDNS, QoS, DHCP Server | <ul style="list-style-type: none"> • Multi-languages Support: Chinese, Dutch, English, French, German, Hebrew, Italian, Portuguese, Russian, Spanish, Turkish • Multiple System Prompts Support: Arabic, Chinese, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish |
|---|---|---|


Compatibel met modules:

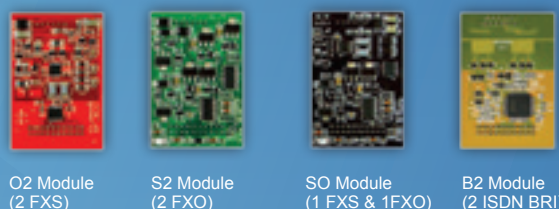

Specificaties

- | | | |
|---|---|---|
| <ul style="list-style-type: none"> • Users: 100 • Concurrent Calls (Max): 25 • Voicemail: 4000 min • Interface: Up to 16 Analog Ports (FXO/FXS); Up to 4 GSM/UMTS Ports; Up to 8 BRI Ports • LAN: 1 (10/100Mbps) • WAN: 1 (10/100Mbps) • Size: 280x175x33mm • Weight: 700g • Power: DC 12V, 5A MAX | <ul style="list-style-type: none"> • Protocol: SIP (RFC3261), IAX2 • Transport Protocol: UDP, TCP, TLS, SRTP • Audio Codec: G.711 (alaw/ulaw), G.722, G.723.1, G.726, G.729A, GSM, SPEEX, ADPCM • Video Codec: H.263, H.263P, H.264, MPEG4 • DTMF: Inband, RFC2833, SIP INFO • Network: Static IP, PPPoE, DHCP, Firewall, VLAN, DDNS, QoS, DHCP Server, OpenVPN | <ul style="list-style-type: none"> • Multi-languages Support: Chinese, Dutch, English, French, German, Hebrew, Italian, Portuguese, Russian, Spanish, Turkish • Multiple System Prompts Support: Arabic, Chinese, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish |
|---|---|---|

Compatibel met modules:

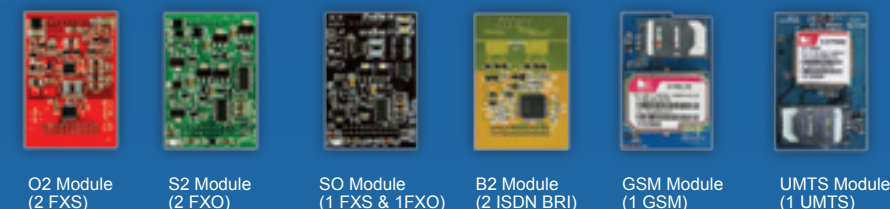

MyPBX® U100





De MyPBX U100 is een 1U rack mount VoIP PBX voor maximaal 100 gebruikers. Deze PBX ondersteunt ISDN BRI, PSTN, GSM/UMTS en VoIP netwerken. Snelheid, stabiliteit en compatibiliteit gecombineerd met een rijke functionaliteit maken de MyPBX U100 uitermate geschikt voor uw bedrijfscommunicatie.



Specificaties

- Users: 100
- Concurrent Calls (Max): 25
- Voicemail: 3000min
- Call Recording: Support
- Interface: Up to 16 Analog Ports (FXO/FXS), Up to 8 GSM/UMTS Ports, Up to 8 BRI Ports.
- AUDIO In/Out: Supported
- LAN: 1 (10/100Mbps)
- WAN: 1 (10/100Mbps)
- Size: 340x210x44 mm
- Weight: 2.1kg
- Power: AC 100-240V, 50~60Hz
- Protocol: SIP (RFC3261), IAX2
- Transport Protocol: UDP, TCP, TLS, SRTP
- Management Protocol: TR-069
- Audio Codec: G.711 (alaw/ulaw), G.722, G.723.1, G.726, G.729A, GSM, SPEEX, ADPCM
- Video Codec: H.263, H.263P, H.264, MPEG4
- DTMF: Inband, RFC2833, SIP INFO
- Network: Static IP, PPPoE, DHCP, Firewall, VLAN, DDNS, QoS, DHCP Server, OpenVPN
- Multi-language Web GUI: English, Simplified Chinese, Traditional Chinese, Portuguese, Spanish, Russian, Hebrew, Turkish, French, German, Italian, Dutch, Polish, Romanian, Albanian, Korean, Thai, Persian, Croatia
- Multiple System Prompts Support: Arabic, Chinese, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish

Compatibel met modules:

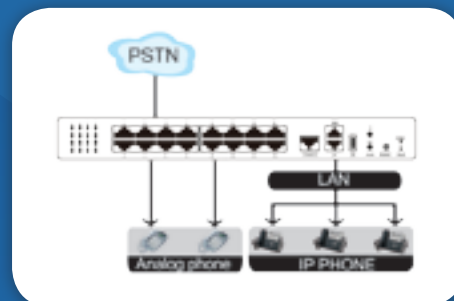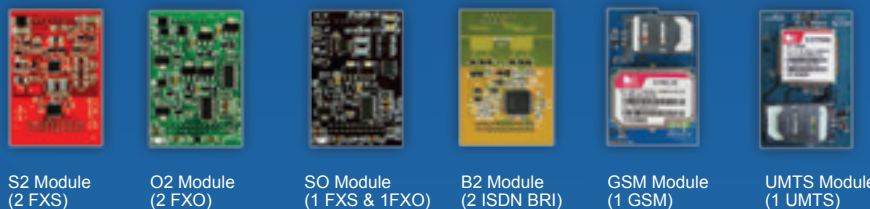

MyPBX® U200





De MyPBX U200 is een krachtiger model dat tot 50 gelijktijdige gesprekken afhandelt en tot 200 gebruikers bedient. Dit model ondersteunt PSTN, ISDN BRI lijnen, GSM/UMTS en VoIP netwerken en is voorzien van audio input en output. De MyPBX U200 biedt ongeëvenaarde prijs-kwaliteit verhouding.



Specificaties

- Users: 200
- Concurrent Calls (Max): 50
- Call Recording: Support
- Interface: Up to 16 Analog Ports (FXO/FXS), Up to 8 GSM/UMTS Ports, Up to 8 BRI Ports
- LAN: 1 (10/100Mbps)
- WAN: 1 (10/100Mbps)
- USB: 1 (USB2.0)
- AUDIO In/Out: Supported
- Size: 340X210X44mm
- Weight: 2.1 kg
- Power: AC 100-240V, 50~60Hz
- Protocol: SIP (RFC3261), IAX2
- Transport Protocol: UDP, TCP, TLS, SRTP
- Management Protocol: TR-069
- Audio Codec: G.711 (alaw/ulaw), G.722, G.723.1, G.726, G.729A, GSM, SPEEX, ADPCM
- Video Codec: H.263, H.263P, H.264, MPEG4
- DTMF: Inband, RFC2833, SIP INFO
- Network: Static IP, PPPoE, DHCP, Firewall, VLAN, DDNS, QoS, DHCP Server, OpenVPN
- Multi-language Web GUI: English, Simplified Chinese, Traditional Chinese, Portuguese, Spanish, Russian, Hebrew, Turkish, French, German, Italian, Dutch, Polish, Romanian, Albanian, Korean, Thai, Persian, Croatia
- Multiple System Prompts Support: Arabic, Chinese, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish
- SDK: A rich set of SDK for seamless integration with 3rd-party applications

Compatibel met modules:

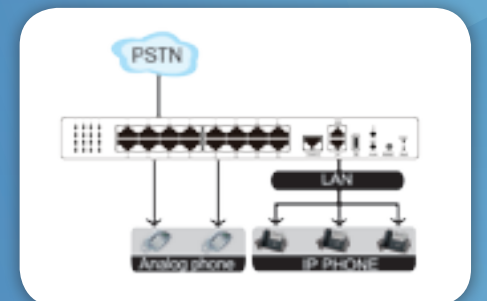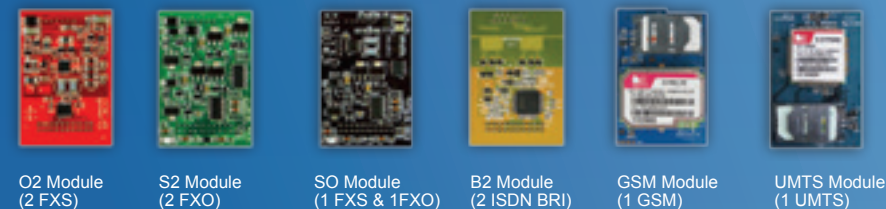

MyPBX[®] U300



De MyPBX U300 is ontworpen om bedrijven welke gebruik maken van ISDN lijnen (E1/T1/J1) beter te kunnen bedienen. Zo ondersteunt de MyPBX U300 50 gelijktijdige gesprekken, redundantie, is hij geschikt als gateway, bevat hij audio in/out en is zowel de behuizing als de interface voorzien van een nieuw ontwerp.




Specificaties

- Users: 300
- Concurrent Calls (Max): 50
- Voicemail: 3000min
- Interface: One E1/T1/J1 Port (Support PRI, MFC R2, SS7), Two FXS Ports.
- LAN: 1 (10/100Mbps)
- WAN: 1 (10/100Mbps)
- USB: 1 (USB2.0)
- AUDIO In/Out: Supported
- Size: 213X160X44mm
- Weight: 1.2kg
- Power: AC 100-240V, 50~60HZ
- Protocol: SIP (RFC3261), IAX2
- Transport Protocol: UDP, TCP, TLS, SRTP
- Management Protocol: TR-069
- Audio Codec: G.711 (alaw/ulaw), G.722, G.723.1, G.726, G.729A, GSM, SPEEX, ADPCM
- Video Codec: H.263, H.263P, H.264, MPEG4
- DTMF: Inband, RFC2833, SIP INFO
- Network: Static IP, PPPoE, DHCP, Firewall, VLAN, DDNS, QoS, DHCP Server, OpenVPN
- Multi-language Web GUI: English, Simplified Chinese, Traditional Chinese, Portuguese, Spanish, Russian, Hebrew, Turkish, French, German, Italian, Dutch, Polish, Romanian, Albanian, Korean, Thai, Persian, Croatia
- Multiple System Prompts Support: Arabic, Chinese, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish
- SDK: A rich set of SDK for seamless integration with 3rd-party applications

Highlights:

1. 1U half-width
2. Support Audio input/output ports
3. Support redundancy (automatic failover)
4. New case design: Move all rear connectors to front panel

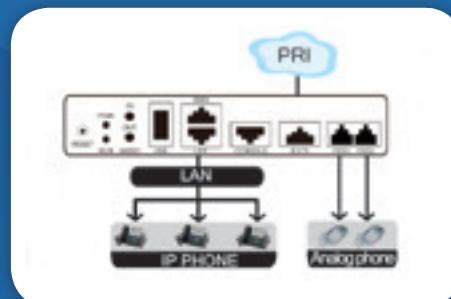

MyPBX[®] U500 / U510 / U520





De MyPBX U500/U510/U520 is met maximaal 80 gelijktijdige gesprekken zeer geschikt voor de veeleisende middelgrote onderneming tot 500 gebruikers. De drie modellen ondersteunen tot 16 FXO, FXS & ISDN poorten, tot 8 GSM & UMTS poorten en koppelen VoIP met traditionele telefoonlijnen gecombineerd met schaalbaarheid, hoge beschikbaarheid, kostenbesparingen en eenvoudiger beheer.



Specificaties

- Users: 500
- Concurrent Calls (Max): 80
- Call Recording: Support
- Hard Disk: Support 2.5 inch SATA2
- Interface: U520 (2 E1/T1/J1) Ports, U510 (1 E1/T1/J1) Port, U500 (0 E1/T1/J1) Port, Up to 16 AnalogPorts(FXO/FXS), Up to 8 GSM/UMTSPorts, Up to 8 BRI Ports
- LAN: 1 (10/100/1000Mbps)
- WAN: 1 (10/100/1000Mbps)
- USB: 1 (USB2.0)
- Size: 438X280X44mm
- Weight: 3.4kg
- Power: AC 100-240V, 50~60Hz
- Protocol: SIP (RFC3261), IAX2
- Transport Protocol: UDP, TCP, TLS, SRTP
- Management Protocol: TR-069
- Audio Codec: G.711 (alaw/ulaw), G.722, G.723.1, G.726, G.729A, GSM, SPEEX, ADPCM
- Video Codec: H.263, H.263P, H.264, MPEG4
- DTMF: Inband, RFC2833, SIP INFO
- Network: Static IP, PPPoE, DHCP, Firewall, VLAN, DDNS, QoS, DHCP Server, OpenVPN
- Multi-language Web GUI: English, Simplified Chinese, Traditional Chinese, Portuguese, Spanish, Russian, Hebrew, Turkish, French, German, Italian, Dutch, Polish, Romanian, Albanian, Korean, Thai, Persian, Croatia
- Multiple System Prompts Support: Arabic, Chinese, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish
- SDK: A rich set of SDK for seamless integration with 3rd-party applications

Compatibel met modules:

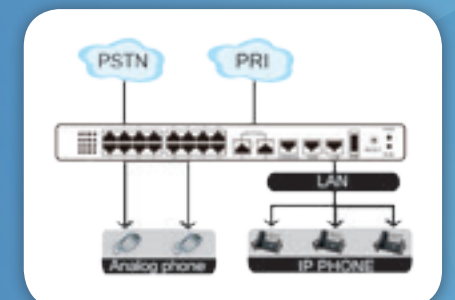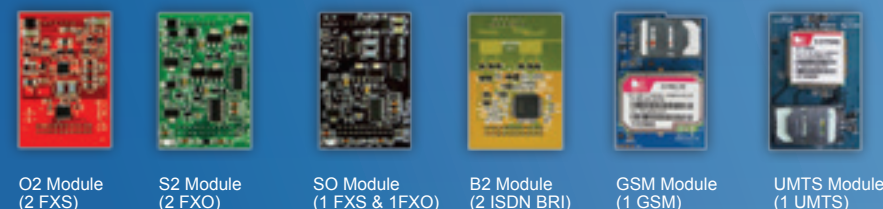



MyPBX® Addons

Ongekende mogelijkheden

De Add-ons voegen krachtige functionaliteit toe aan uw MyPBX.



Billing Add-on

Als toevoeging op het CDR overzicht is de Billing Add-on ontwikkeld om inzage te geven in gesprekskosten. De Billing Add-on maakt het mogelijk om de gesprekskosten te registreren, te analyseren, maar ook om gebruik te maken van bijvoorbeeld beltegoeden op extensies. Zowel beltegoed op basis van prepaid als op factuur zijn mogelijk. Naast de gespreksoverzichten geeft dit de mogelijkheid om het belgedrag en de daaraan gekoppelde kosten eenvoudig te beheren en in de gaten te houden.



Extensie beheer



Flexibele gesprekskosten



Real-time billing



Call Recording Add-on

Call Recording geeft de mogelijkheid om alle inkomende en uitgaande gesprekken automatisch op te nemen, voor bijvoorbeeld trainingsdoeleinden.




Opslag



Beschikbaarheid



MyPBX Client

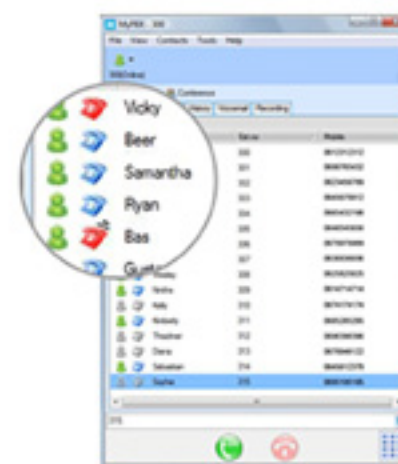


Met de MyPBX client kunt u eenvoudig, vanaf uw workstation, uw telefoon bedienen en overzien. De MyPBX verbindt uw PC met uw telefoon waardoor u, vanaf uw PC, een gesprek kunt starten, een gesprek doorverbinden, de status kunt zien van andere telefoons, een conference call kunt opzetten, uw contacten kunt beheren, uw gespreksoverzicht kunt inzien, luisteren van voicemails, etc. Kortom een veelzijdige applicatie als verlenging van uw telefoon.

Beschikbaarheid
Gesprekken beheren
Voicemail
Instant Messaging
Conferencing



Hotel Add-on


De hotel Add-on is gelijk aan het Billing System, maar met enkele toevoegingen speciaal voor hotels; kamer status, boekingen, inchecken, uitchecken, niet storen en mini bar verwerking.



Receptie



Receptie




Rijk aan functionaliteit

Items		SOHO	Standard	U100	U200	U300	U500/U510/U520
Users		32	100	100	200	300	500
Concurrent Calls (Max)		15	25	25	50	50	80
Voicemail		4000 min	4000 min	Default 3000 min (upgradable)			
Hard Disk		-	-	-	-	-	Support 2.5 inch SATA2
USB		-	-	1	1	1	1
Telephone Interface	Analoge Ports (Max)	4	16	16	16	2	16
	GSM Ports (Max)	-	4	8	8	-	8
	UMTS Ports (Max)	-	4	8	8	-	8
	BRI Ports (Max)	4	8	8	8	-	8
	E1/T1/J1	-	-	-	-	1	0/1/2
Network Interface	LAN	1 (10/100Mbps)					1 (10/100/1000Mbps)
	WAN	-	1 (10/100Mbps)				1 (10/100/1000Mbps)
VoIP	Protocol	SIP (RFC3261), IAX2					
	Transport Protocol	UDP, TCP, TLS, SRTP					
	Management Protocol	-	-	TR-069	TR-069	TR-069	TR-069
	Audio Codec	G.711 (alaw/ulaw), G.722, G.723.1, G.726, G.729A, GSM, SPEEX, ADPCM					
	Video Codec	H.263, H.263P, H.264, MPEG4					
	DTMF	Inband, RFC2833, SIP INFO					
Network	Connection Type	Static IP, DHCP	Static IP, PPPoE, DHCP, OpenVPN				
	Others	Firewall, VLAN, DDNS, QoS, DHCP server					
Recording	One Touch Record (Manual)	Support	Support	Support	Support	Support	Support
	Call Recording (Auto)	-	-	On demand	On demand	On demand	By default
Redundancy		-	Support	Support	Support	Support	Support
MyTwins		Support	Support	Support	Support	Support	Support
Audio In/Out		-	-	Support	Support	Support	-
Call Back		-	Support	Support	Support	Support	Support
FAX (T.38)		Support	Support	Support	Support	Support	Support
SMS to Mail / Mail to SMS		-	Support	Support	Support	-	Support
Add-ons		-	-	Support	Support	Support	Support
Features		Attended transfer Blind transfer BLF support Call detail records Call forward Call pickup Call routing Call transfer Call waiting Caller ID Conference Define office time Dial by name		DISA (Direct inward system access) Distinctive ringtone DNIS Do not disturb Firewall Follow me IP Blacklist IVR (Interactive Voice Response) Intercom/Zone Intercom Music on hold Paging/zone paging Phone provisioning PIN user		Queue Ring group Skype integration Speed dial Spy functions Three-way calling Video calls supported Voicemail Voicemail to email Web-based control panel	

VOORBEELD CONFIGURATIES


VOIP SOLUTIONS FOR SMBS

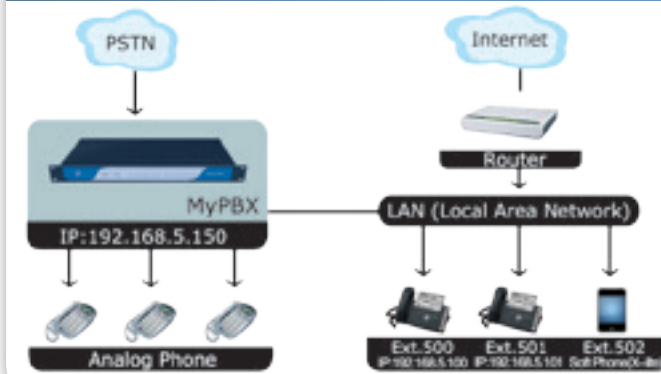


MAKE OR RECEIVE CALLS VIA YOUR VOIP PROVIDER




MULTI-SITE & BRANCH OFFICES

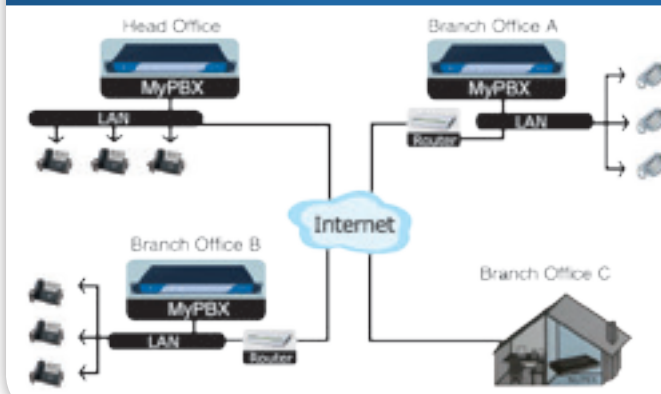


MYPBX AS SIP GATEWAY FOR LYNC/OCS SERVER

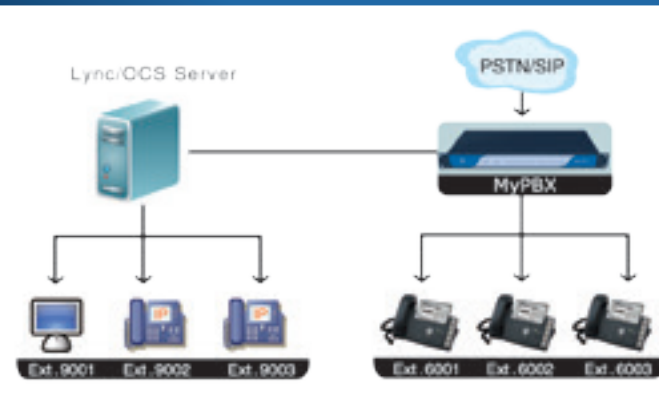

COMBINE MYPBX WITH EXISTING TRADITIONAL PBX

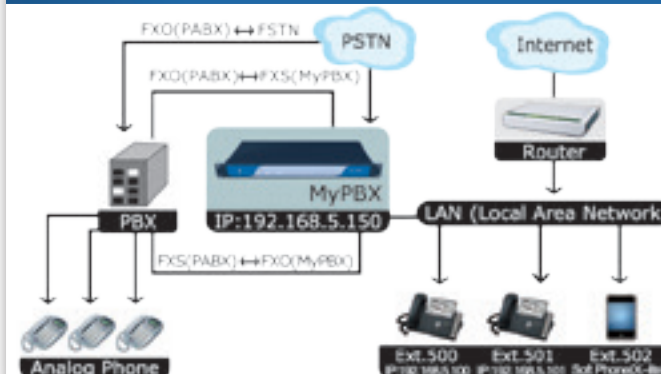

REDUNDANCY (FAILOVER SOLUTION)

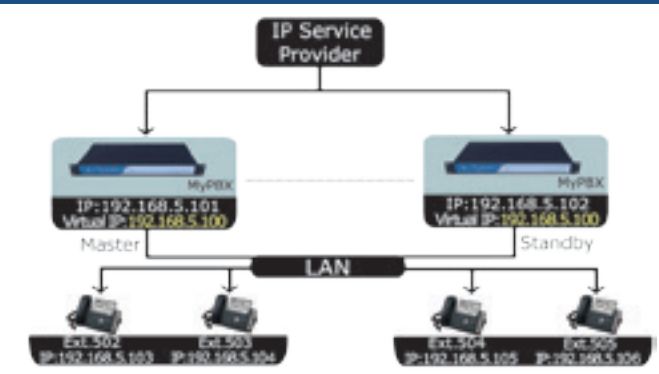

WHAT SIP PHONES CAN I USE WITH MYPBX

ASTRA

CISCO

Grandstream

Polycom

snom

Yealink