

Panasonic Configuration Guides

Yeastar Technology Co., Ltd.

Table of Contents

About This Guide	3
Register Panasonic IP phone with MyPBX Manually	5
Provisioning for MyPBX	9

About This Guide

This guide is applicable to Panasonic IP Phone KX-UT113 /KX-UT123 /KX-UT133 /KX-UT136 /KX-UT248/KX-UT670/TGP500/TGP550.

Please note:

This guide has been tested with Panasonic KX-UT123 with firmware version 01.278. Be aware that different firmware versions may have different web interface formats and functionality.

This guide will configure the IP phone with default configuration. If you are not sure about the configuration of your IP phone, please reset your phone.

How to Reset Panasonic IP phone:


For KX-UT113 /KX-UT123 /KX-UT133 /KX-UT136 /KX-UT248

1. Press **Setting** or **Setup** .
2. Press **#[1][3][6]**.
3. Press **[▲]** or **[▼]** to select "**Factory Setting**", and then press **[ENTER]**.
4. Press **[▲]** or **[▼]** to select "**Yes**", and then press **[ENTER]**.
5. Press **[▲]** or **[▼]** to select "**Yes**", and then press **[ENTER]**.



Figure 1-1 Reset Panasonic Phone

For KX-UT670

1. After starting the unit, press and hold the RESET button (❶) with a pointy object until the screen is cleared.

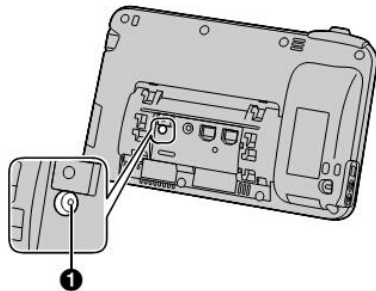

2. After the unit is restarted and ****Reset Menu**** is displayed, tap the key sheet in the following order:

 →  →  →  → 




3. Tap  or  to select the resetting type, and then tap .

Figure 1-2 Reset Panasonic Phone

For TGP500/TGP550



Figure 1-3 Reset Panasonic Phone

For more detailed instructions about how to reset IP phone, please refer to Panasonic IP phone manual.

Register Panasonic IP phone with MyPBX Manually

1. Start up the phone and identify its IP Address. In this guide, the IP Address of the phone is 192.168.2.153, and IP Address of the MyPBX is 192.168.2.127

1. Press **Setting** or **Setup** .
2. Press **[▲]** or **[▼]** to select "Information Display", and then press **[ENTER]**.
3. Press **[▲]** or **[▼]** to select "IP Address".
4. Press **[CANCEL]**.

Figure 1-2 Identify the IP of Panasonic Phone

2. Open the web port of Panasonic phone

1. Press **Setting** or **Setup** .
2. Press **#[5][3][4]**.
3. Press **[▲]** or **[▼]** to select "On" for "Embedded web", and then press **[ENTER]**.

Figure 1-3 Open the Web Port of Panasonic Phone

3. Point your browser to the web interface of the phone: <http://192.168.2.153> and enter the login credentials (default username "admin"; default password "adminpass")
4. We need to set the phone to register with MyPBX. Click "VoIP -> Line 1" tab, and configure as follows:
 - 1) In the "Phone Number" & "SIP Server" section:

Phone Number	
Phone Number	<input type="text" value="301"/>
SIP URI	<input type="text"/>
SIP Server	
Registrar Server Address	<input type="text" value="192.168.2.127"/>
Registrar Server Port	<input type="text" value="5060"/> [1-65535]
Proxy Server Address	<input type="text" value="192.168.2.127"/>
Proxy Server Port	<input type="text" value="5060"/> [1-65535]
Presence Server Address	<input type="text"/>
Presence Server Port	<input type="text" value="5060"/> [1-65535]

Figure 1-4 Number &SIP Server

- Phone number: the number of extension.
- Registrar Server Address: the IP address of MyPBX.
- Registrar Server Port: the port number to use for communication with MyPBX. Default value:5060.
- Proxy Server Address: the IP address of MyPBX.
- Registrar Server Port: the default value is 5060.

2) Authentication

Outbound Proxy Server	
Outbound Proxy Server Address	<input type="text"/>
Outbound Proxy Server Port	<input type="text" value="5060"/> [1-65535]
SIP Service Domain	
Service Domain	<input type="text"/>
SIP Source Port	
Source Port	<input type="text" value="5060"/> [1024-49151]
SIP Authentication	
Authentication ID	<input type="text" value="301"/>
Authentication Password	<input type="password" value="....."/>

Figure 1-5 SIP Authentication

- Source Port : the SIP port number for each line must be unique, default value: 5060 (for Line 1) and 5070 (for Line 2).
- Authentication ID:same as the extension's number in general.

- Authentication Password: password of extension.

3) Set transport protocol

DNS	
Enable DNS SRV lookup	<input checked="" type="radio"/> Yes <input type="radio"/> No
SRV lookup Prefix for UDP	<input type="text" value="_sip_udp."/>
SRV lookup Prefix for TCP	<input type="text" value="_sip_tcp."/>
Transport Protocol for SIP	
Transport Protocol	<input checked="" type="radio"/> UDP <input type="radio"/> TCP

Figure 1-6 Transport Protocol

- Transport Protocol : same as the option on extension page


4) Others

Timer Settings	
T1 Timer	<input type="text" value="500"/> milliseconds
T2 Timer	<input type="text" value="4"/> seconds
Timer B	<input type="text" value="32000"/> milliseconds [250-64000]
Timer D	<input type="text" value="5000"/> milliseconds [0, 250-64000]
Timer F	<input type="text" value="32000"/> milliseconds [250-64000]
Timer H	<input type="text" value="32000"/> milliseconds [250-64000]
Timer J	<input type="text" value="5000"/> milliseconds [0, 250-64000]
Quality of Service (QoS)	
SIP Packet QoS (DSCP)	<input type="text" value="0"/> [0-63]
SIP extensions	
Supports 100rel (RFC 3262)	<input type="radio"/> Yes <input checked="" type="radio"/> No
Supports Session Timer (RFC 4028)	<input type="text" value="0"/> seconds [60-65535, 0: Disable]
NAT Identity	
Keep Alive Interval	<input type="text" value="0"/> seconds [10-300, 0: Disable]
Supports Rport (RFC 3581)	<input type="radio"/> Yes <input checked="" type="radio"/> No
Security	
Enable SSAF (SIP Source Address Filter)	<input type="radio"/> Yes <input checked="" type="radio"/> No

Figure 1-7 Other Settings

- Set these options by default as the figure shows


- Click the button "Save" and the phone will register with MyPBX. This can be verified via "Status" both of the IP phone and PBX.

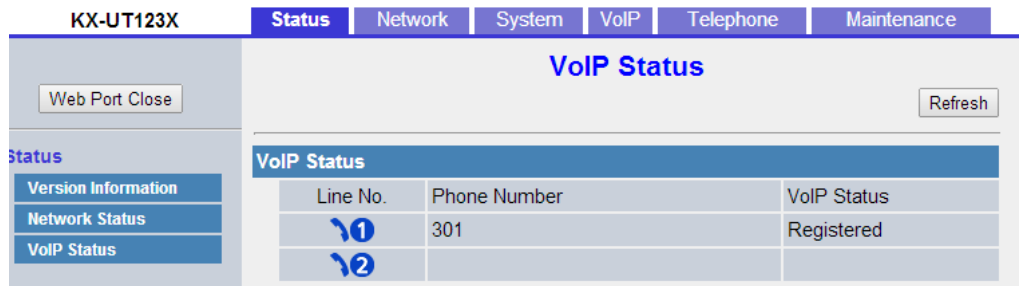

The screenshot shows the 'VoIP Status' page for a Panasonic IP phone (model KX-UT123X). The page has a navigation bar with tabs for Status, Network, System, VoIP, Telephone, and Maintenance. The 'VoIP Status' tab is selected. On the left, there is a 'Web Port Close' button and a 'Status' menu with options for Version Information, Network Status, and VoIP Status. The main content area displays a table with the following data:

Line No.	Phone Number	VoIP Status
1	301	Registered
2		

Figure 1-8 VoIP Status on IP phone

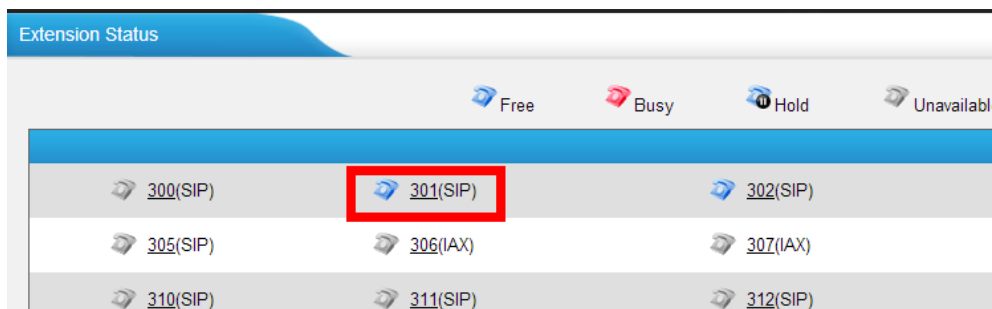

The screenshot shows the 'Extension Status' page on the MyPBX interface. At the top, there are status icons for Free (blue), Busy (red), Hold (blue with 'H'), and Unavailable (grey). Below this is a grid of extension statuses:

300(SIP)	301(SIP)	302(SIP)
305(SIP)	306(IAX)	307(IAX)
310(SIP)	311(SIP)	312(SIP)

Figure 1-8 Extension Status on MyPBX

Provisioning for MyPBX

1. Verify Firmware Installed on Your Phone

Verify the firmware version currently installed on the "Status" page.

2. Plug Phone into the network

Plug your Panasonic IP phone into your LAN. (The Phone must be on the same LAN as that of MyPBX's IP address).

3. Approve Phone and Assign an Extension

To do provisioning with Panasonic IP phones, you need to set MyPBX as the only working DHCP server

Step1. Disable DHCP Server on your local network.

E.g. Disable DHCP Server on Linksys Router.

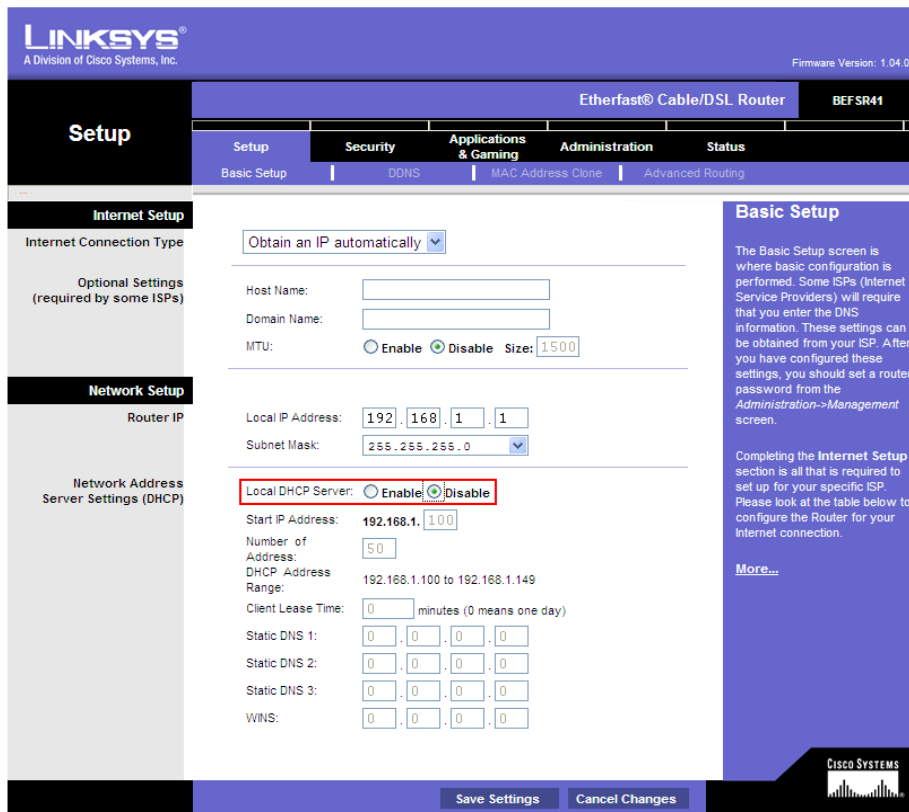


Figure 2-1 Disable DHCP Server on Linksys Router

Step2. Make sure DHCP is enabled on Panasonic IP phone. The default setting of DHCP for IP Phone is "Automatic", so you can skip this step and go to next step.


If the DHCP is disabled, please follow steps below to enable it.

1. Press **[Setting]** or **[Setup]**.
2. Press **[▲]** or **[▼]** to select **"Network Settings"**, and then press **[ENTER]**.
3. Press **[▲]** or **[▼]** to select **"Network"**, and then press **[ENTER]**.
4. Press **[▲]** or **[▼]** to select **"DHCP"**, and then press **[ENTER]**.
5. Press **[▲]** or **[▼]** to select **"Automatic"** for DNS, and then press **[ENTER]**.
 - Select **"Manual"** to enter the addresses for DNS1 (primary DNS server) and, if necessary, DNS2 (secondary DNS server) manually, and then press **[ENTER]**.
6. Press **[CANCEL]**.

Figure 2-2 Enable DHCP on Panasonic phone

Step3. Enable DHCP Server on MyPBX.

Login MyPBX web interface, System -> DHCP Server -> Enable DHCP Server

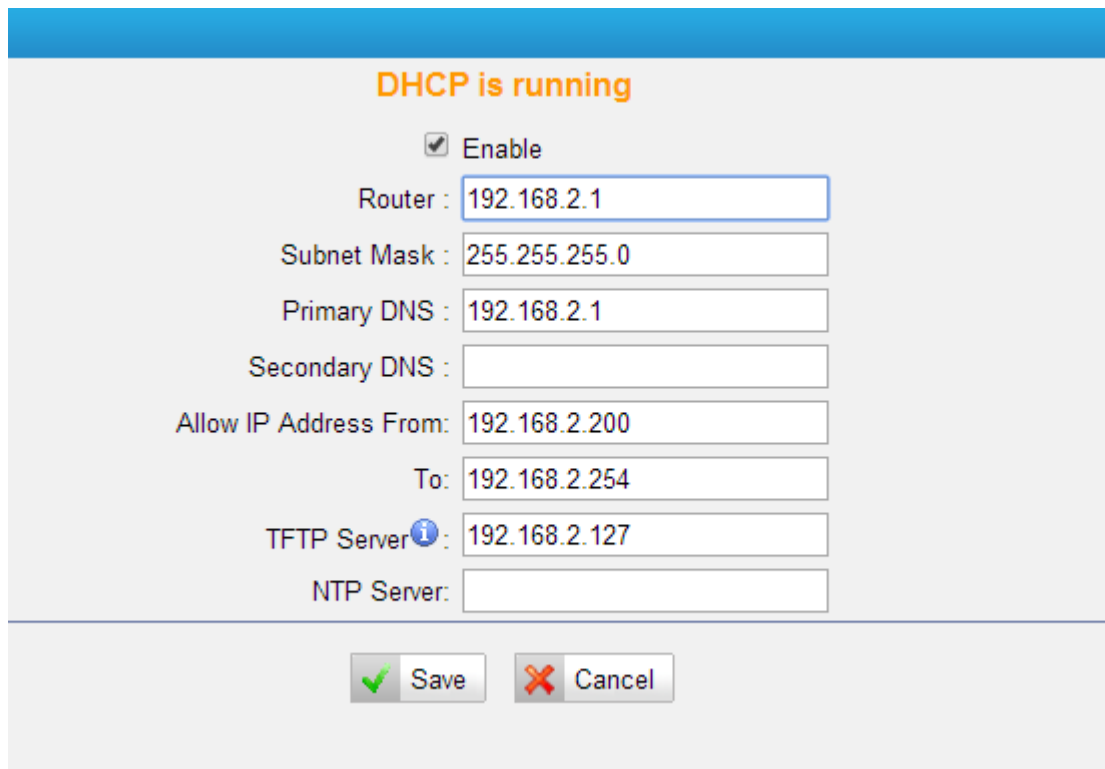

DHCP is running

Enable

Router :

Subnet Mask :

Primary DNS :

Secondary DNS :

Allow IP Address From:

To:


TFTP Server ⁱ:

NTP Server:

Figure 2-3 Enable DHCP Server on MyPBX

Step4. Configure phones on MyPBX Auto-Provision page.

- 1) Login MyPBX web interface, Basic->Extensions->Phone Provisioning->Add Phone.

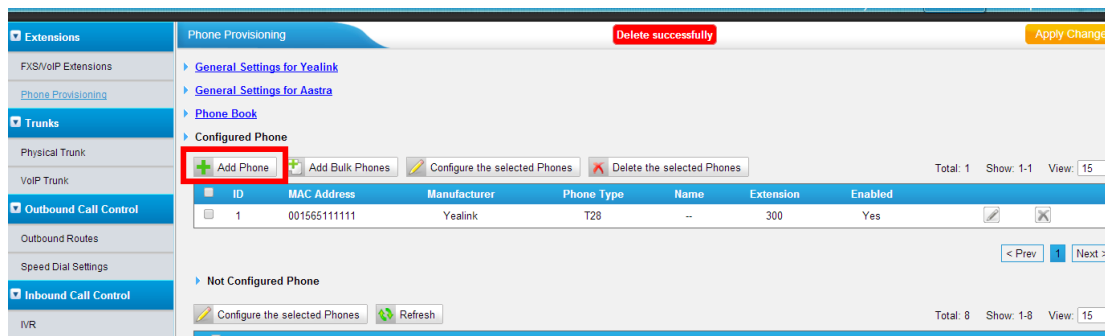

ID	MAC Address	Manufacturer	Phone Type	Name	Extension	Enabled
1	001565111111	Yealink	T28	--	300	Yes

Figure 2-3 Phone Provisioning

2) Fill in the phone detail message on the pop-up windows.

Input IP Phone's MAC address, Name, Manufacturer, Phone type, Line, Extension and so on for the phone.

In this case, Panasonic KX-UT123 IP phone's MAC address is 0080f005BF96

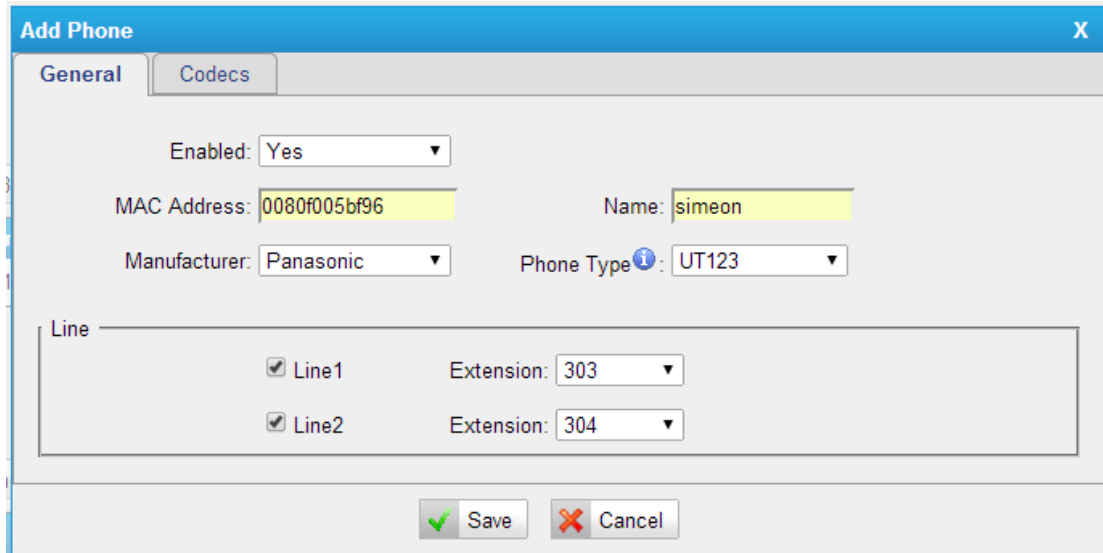


Figure 2-4 Add Panasonic Phone

Step4. Save the settings and reset the IP phone manually to make configuration take effect.

1. Press **Setting** or **Setup** .
2. Press **#[1][3][6]**.
3. Press **▲** or **▼** to select "**Factory Setting**", and then press **[ENTER]**.
4. Press **▲** or **▼** to select "**Yes**", and then press **[ENTER]**.
5. Press **▲** or **▼** to select "**Yes**", and then press **[ENTER]**.

Figure 2-5 Reset Panasonic Phone

Step5. Done.

<End>