

VIKING


Viking Electronics, Inc.
1531 Industrial Street
Hudson, Wisconsin 54016

Discovering practical applications for advanced technology.
Sales Line: 715-386-8861

Technical Practice

ITEM: FaxMonitor
MODEL: FAXM-1
ISSUE: November, 1989

Monitor Fax Machine Activity From A Remote Location

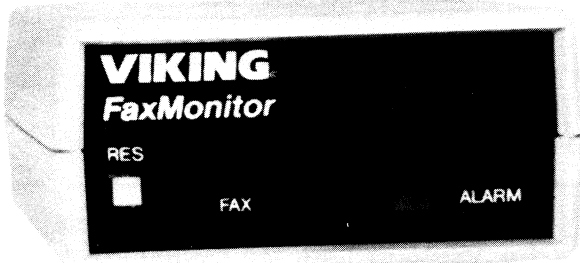

FaxMonitor allows you to “check the fax” without leaving your desk. Since most fax machines are not located next to the desk, the **FaxMonitor** provides the convenience of a remote “message waiting” indication the minute a fax has arrived. **FaxMonitor** gives a short, attention-getting tone burst when the fax transmission is complete.

FaxMonitor provides a flashing visual indication and an audible alarm signaling office personnel that, for whatever reason, the fax machine is not answering. This could be due to a paper jam, paper outage, the fax machine being turned off, or any other fax machine trouble.

FaxMonitor is simple to install in a large office or home office environment, using a 2-wire connection. A U.L. listed power supply is included.

INSTALLATION

1. Ambient temperature should be 0°C to 40°C with 5% to 95% non-condensing humidity. A surge protector is recommended.
2. Connect the red and green wires in the **FaxMonitor** line cord to the red and green wires in the fax machine line cord. The **FaxMonitor** is not polarity sensitive. A “T-Adaptor” plugged into the fax machine’s RJ-11/RJ-14 phone jack may be used. Plug the adaptor into a 120 volt AC power outlet. The **FaxMonitor** is now ready for use. (See Illustration B)

CAUTION: Some fax machines require 4 to 6 rings prior to answering. If your machine is of that type, you must cut the JUMPER WIRE located in the 3/8" square access hole on the bottom of the **FaxMonitor**. (See Illustration A)

