

# ***JK Audio***

---

## **THAT-2**

**Telephone Handset Audio Tap**

**Users Guide**


---

***Telephone Interface Products***

# Connections

THAT-2 goes between the handset and the base of your telephone. Follow these simple steps.....

1. Unplug the modular handset cord from your telephone base.
2. Using the black handset jumper cord that we have provided, connect the *telephone* jack of THAT-2 to the handset jack on your telephone base.
3. Plug your handset cord, and handset, into the *handset* jack on THAT-2.
4. Connect your audio equipment to the line input and output jacks on THAT-2.

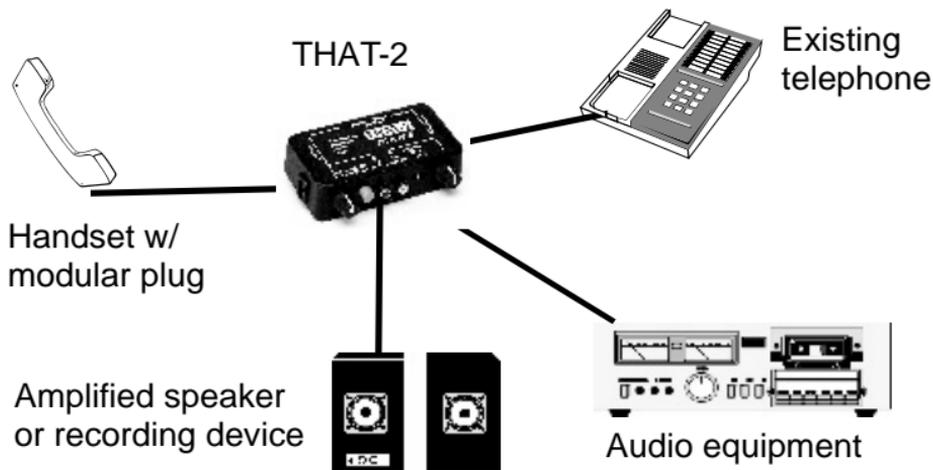

## Features

The name THAT-2 stands for "Telephone Handset Audio Tap" which is a perfect description of this product. Simply install THAT-2 between the handset and the base of your telephone and you will be able to record audio from the telephone and send audio into the telephone.

### ***To Phone Jacks***

There are two input jacks on THAT-2. You can use either the red RCA phono jack on the front or the female XLR jack on the back. These are line level inputs for signals that you want to send down the phone line. These jacks can be connected to an audio output such as the headphone output jack on a tape recorder, the line output of a PC audio card, or the line output from a CD player or audio mixer.

### ***From Phone Jacks***

There are two output jacks on THAT-2. Both the white RCA phono jack on the front, and the male XLR jack carry the same signal.

## Features (continued)

These mic level jacks provide a mix of both sides of the conversation. In other words, whatever you send down the phone line will come back on these jacks mixed with the audio from the other side of the call. This mix ratio is not adjustable, it is a function of the telephone, not our product. As it turns out, this is a suitable mix ratio for most applications.

The supplied adapter cable allows you to take the left channel from a 1/8" mini stereo headphone or mono microphone jack and attach it to the RCA jacks on THAT-2.

### ***Handset Type Switch***

The three position switch on the front of THAT-2 selects the type of microphone that is in the handset of your telephone. When you push in the *Line In* button, THAT-2 replaces the handset microphone signal with a circuit that must match the characteristics of the handset microphone. The *Handset Type* switch can cover the main three microphone types, but keep in mind that there is no industry standard for microphone types or

## Features (continued)

characteristics and therefore we cannot guaranty a perfect match with every telephone. There is no way to tell which type of microphone is in your telephone handset. Simply use the position that sounds best without clipping or signal break-up.

Switch Position	Handset Microphone Type
A	Electret
B	Dynamic
C	Carbon

## Operating

The *Handset / Line In* button selects which signal will be sent down the phone line; the handset microphone, or the line input jacks.

When the *Handset / Line In* button is out, you can use the handset to speak and listen as you normally would. The sound that you hear on the handset is always available on the line output jacks.

With the button in, the handset microphone is disconnected and the line input is connected to send audio signals into the phone and down the line.

You can also use the *Handset / Line In* button to turn off the handset mic if you are listening to the line output signal over a loudspeaker. This will prevent feedback between the handset microphone and loudspeaker. In any case you can always listen over the handset receiver.

Note: Not all telephones are built alike so we cannot guarantee THAT-2 will work with any handset design out there.

## Operating

We designed the interface to work with most popular designs. If a conflict arises it will typically be on the line input side. If you attempt to send voice band signals down the line input jack and the distant party complains that the level is too loud or severely distorted (clipping), try to lower the transmit signal on your audio equipment. If this does not help, discontinue use immediately.





# FCC Registration

Your new JK Audio product has been registered with the Federal Communications Commission (FCC). This product complies with the standards in Part 68 of the FCC rules. The FCC requires us to provide the following information:

**1. Connection and use with the nationwide telephone network**

The FCC requires that you connect this telephone equipment to the national telephone network through a FCC registered telephone.

This equipment may not be used with Party Line Service or Coin Telephone Lines.

**2. Information for the telephone company**

Upon request from your local telephone company, you are required to provide the following information:

a) The "line" to which you will connect the telephone equipment (that is, your telephone number), and

b) The telephone equipment's FCC registration number. This can be found on the bottom of your telephone equipment.

**3. Repair Instructions**

If it is determined that your telephone equipment is malfunctioning, the FCC requires that it not be used and that it be unplugged from the modular

## **FCC Registration (continued)**

outlet until the problem has been corrected.

**Repairs to this telephone equipment can only be made by the manufacturer or its authorized agents or by others who may be authorized by the FCC. For repair procedures, follow the instructions outlined under the warranty section of the manual.**

### **4. Rights of the telephone company**

If telephone equipment is causing harm to the network, the telephone company may temporarily discontinue your telephone service. If possible, they'll notify you before they interrupt service. If advanced notice isn't practical, you'll be notified as soon as possible. You'll be given the opportunity to correct the problem, and you'll be informed of your right to file a complaint with the FCC.

Your telephone company may make changes in its facilities, equipment, operations or procedures that could affect the proper functioning of your JK Audio product. If such changes are planned, you'll be notified.

If this telephone equipment is to be used with a telephone that is leased or owned by another party, permission to connect this telephone equipment to their telephone must first be obtained.

## Warranty

The model THAT-2 is covered by a 2 year warranty to be free from defective workmanship and materials. In the event that the THAT-2 needs repair, you must call us to get an authorization, and then carefully pack and ship it to us. You will pay for shipping to us and we will pay for return back to you, UPS ground. No free repairs will be made if the defect was caused by misuse, weather conditions, or other cause, except for defective workmanship or materials. THERE ARE NO EXPRESS OR IMPLIED WARRANTIES WHICH EXTEND BEYOND THE WARRANTY HERE MADE.

2/00

---

***JK Audio Inc.***

2701 N. 45th Road, Sandwich, IL 60548 (815) 786-2929