




The model PS-48-RG Power Supply provides 48 Volts talk battery plus ringing. The unit is in one convenient wall mounted housing, designed to be mounted in the telephone closet.

The PS-48-RG Power Supply will provide telecommunication devices with 48V DC talk battery where required.

The PS-48-RG Ringing Generator will produce continuous ring voltage rated at 3.0 REN.

Applications include: Electronic KSU's, Paging Systems, OPX's, etc.

INSTALLATION

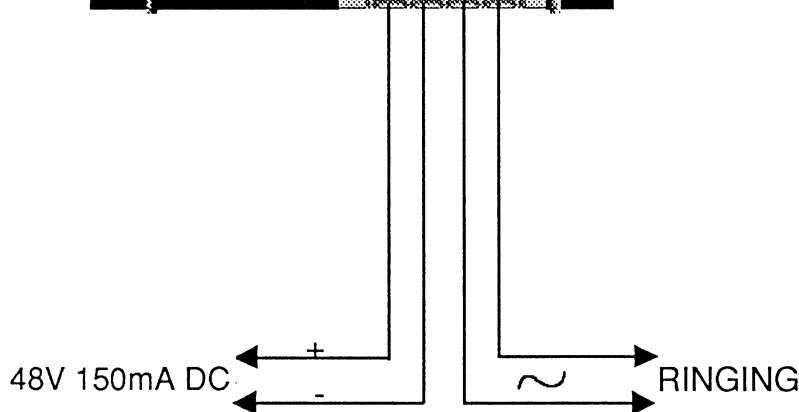

SPECIFICATIONS

Power: 13.5V AC power supply included

Dimensions: 5.25"L X 3.5"W X 1.75"H
13.50cm. X 9cm. X 4.5cm.

Weight: 1 lb, .45kg. (shipping)

Environmental: 32°F to 90°F, 0°C to 40°C with 5% to 95% noncondensing humidity

Outputs:

#1: 48V nominal @150 mA DC Talk Battery

#2: 90V 20 hz ringing.

Capable of ringing 3 REN load