


Model: UIS-311

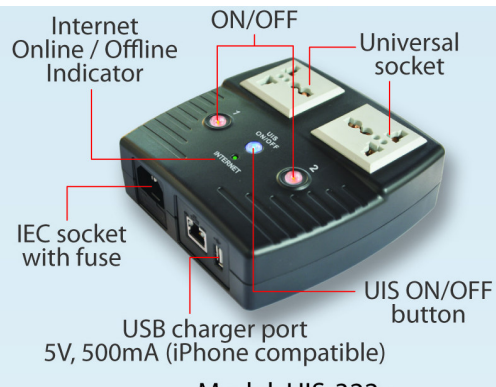

Model: UIS-322x

Model No:	UIS-311	UIS-315	UIS-322	UIS-323
Available Socket types	3x Schuko socket <i>Shuttered</i> (Type F, CEE 7/4)	3x North American (Type B, NEMA 5-15R)	2x of either; a) Universal socket b) USA (Type B, NEMA 5-15R) c) UK ~ <i>w/o shutter</i> (Type G, BS1363, MS589, SS145) d) AUST / China (Type I, AS / NZS3112, CCC)	2x of either; a) Schuko~ <i>shuttered</i> (Type F, CEE 7/4, 7/17) b) UK ~ <i>shuttered</i> (Type G, BS1363, MS589, SS145) c) French (Type E, CEE 7/5) d) Danish (Type K, Section 107-2-D1)
Certification	CE, LVD, RoHS compliant	FCC	FCC	CE, LVD, RoHS Compliant
Electrical Rating	Input: 250V~50/60Hz Output: 10A, 2500W (total for 3 sockets)	Input: 125~250V, Output: 10A, 1250W (total for 3 sockets)	Input: 125~250V~50/60Hz Output: 10A (for 2 sockets) & DC5V, 500mA (for USB port)	
Surge Energy Joule Rating	918J	540J	n/a	
Clamping Voltage	775V	400V	n/a	
Max Peak Spike Current	12,000Amps	12,000Amps	n/a	
Surge Protect Indicator	Yes	Yes	n/a	
Surge Protection Failure	Surge Shut Down & Auto Power S/Down	Surge Shut Down & Auto Power S/Down	n/a	
Breaker	10A (resettable)	10A (resettable)	10A (Thermal fuse)	
Available Sockets	2x fixed, 1x swivel	1x fixed, 2x swivel	2x fixed	
Internet Control-able	2x fixed socket	2x swivel socket	2x fixed socket	
Power ON / OFF switch	n/a	Main power ON / OFF switch	Individual outlet power ON / OFF LED button (Press & hold 2 seconds)	
Power Indicator	Green LED	Green LED	Orange LED	
Reset to Factory Default	n/a	n/a	Long press all 3 LED buttons	
Internet Indicator	Red LED	Red LED	Green LED	
Web Server CPU	32-Bit RISC CPU			
Supported browser	IE and Java			
Supported Network Protocols	HTTP, TCP/IP, UDP, SMTP, PPPoE, Dynamic DNS, DNS Client, SNTP, BOOTP, DHCP, FTP, SNMP.			
Network Access	10/100 Base-T , RJ45 (Cat. 5)			
Operating Environment	0°C ~ 60°C at 10% ~ 90% relative humidity. For indoor use only.			
Package	White / Color Box			