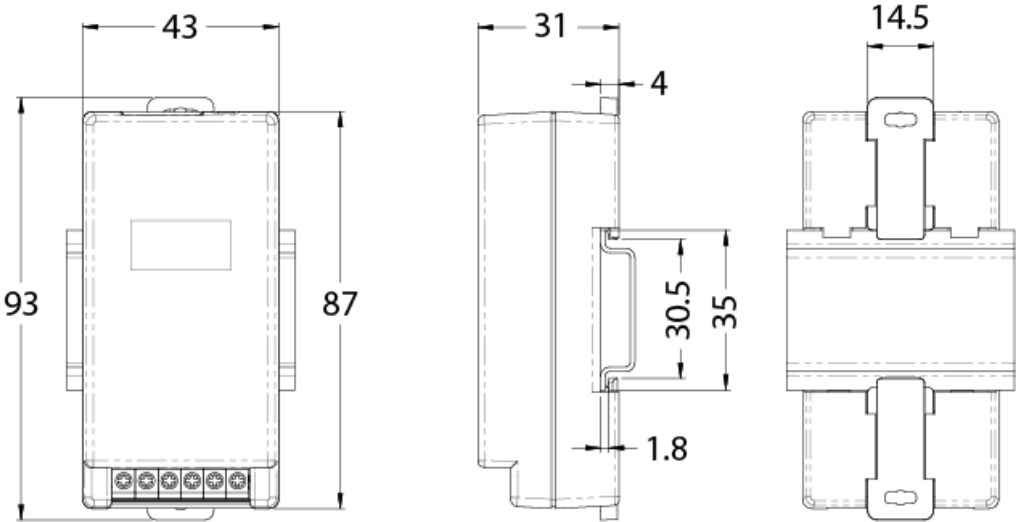


Product Name	ezJack-2R (DinRail, Auto Power Reboot when Ping Fails)
Model No.:	EJ-21
Brief Description	ezJack-2R DinRail is an autonomous power-reset device. It's primary function is to detect and automatically executes a power-cycle when either; - The internet connectivity is lost or, - The monitored network device (eg. IP Camera, Wi-Fi AP, switches, NAS or IoT devices) is non-responsive. - Schedule power Off / On / Reset. Features: - DC-in, DC-out - Connector: 6-pin terminal block for 1x input and 2x output. - Built-in circuit breaker. - Input and Output connector protected against reverse wiring. - Informative OLED display - Patented power restart method in response to network connection status. - Ethernet port. - Support Wi-Fi and Bluetooth connection. - Remotely manage via either the ad-free ezDevice Android / iOS APP - Remotely manage via Cloud4UIS.com platform. - Auto reset device when internet ping fails. - Set schedules to turn device On / Off / Reset. - Small form factor. ezDevice APP & Cloud4UIS platform features; - Intuitive simple to use remote management platform. - Share Device ~ Set other users access and control permissions. - Group Device for ease of management. - Mark favorite unit for quick assessment. - OTA device upgrade. 
Hardware Setup	- Connect Router's power cable to ezJack-2R output terminal. - Connect power input cables to ezJack-2R power input terminals. - Connect LAN cable to ezJack-2R - Scan ezJack-2R QR code to download ezDevice APP - Add ezJack-2R to Cloud4UIS.com
Package contents	ezJack-2R device - Quick Installation Guide - LAN cable

Image	
Description	Function Button RJ45 Port OLED Display 6-Pin Terminal Block Top Din-Rail / Wall Mount Slot Bottom Din-Rail / Wall Mount Slot
Dimensions (mm)	
Din Rail Specification:	• TS-35/7.5/1.0 • TS-35/15/1.5 • DNR274 • DNR314

	• DNR315
Control and management interface:	• ezDevice APP ('Ad free' on Android / iOS) • Cloud4UIS.com (Life-time free usage, with optional Business Account) • Web Interface • Device 'Function Button' • API (by request)
Function Button	• Press & Hold = Execute Selection • Press 1x = Goto Next Option
Network Access	• Ethernet 10/100 Base-T • Wi-Fi 2.4Ghz (802.11b/g) • Bluetooth V4.2 BLE
Electrical Rating	• Input: DC 9V~48V, 2A • Output: DC 9V~48V, 2A (CH1 + CH2) MAX 96W.
Support	Android APP / iOS APP / Microsoft Edge / Chrome / Java / Safari browser
Certification	FCC ID (USA), NCC (Taiwan), KCC (Korea), CE (Europe), CMIIT ID (China), ISED ID (Canada), MIC (Japan)
Operating Temperature	-40°C ~ 85°C at 10% ~ 90% relative humidity. <i>For indoor use only.</i>
Network Surge	Contact / Air Discharge: 12KV / 15KV
Product Package	 Brown Box or In-Bulk
Package Dimension	70 x 40 x 110 mm
Net(Gross) Weight / Set	TBD
Carton Measurement	TBD