

VIKING

Viking Electronics, Inc.
1531 Industrial Street
Hudson, Wisconsin 54016

Discovering practical applications for advanced technology.

Sales Line: 715-386-8861

Technical Practice

ITEM: One Number Dialer

MODEL: K-1500-4
PG-1 Programmer



Hot-Line One Number Dialer

- Converts Any Standard Phone to a Dialer
- Replaces Leased Ring Down Circuits
- Eliminates Mileage Charges
- Line Powered
- Operates on Standard C.O. Lines

APPLICATIONS INCLUDE:

- Security And Emergency Phones
- Hotel/Motel Reservations
- Credit Authorization
- Airline Reservations
- Elevator Phones
- Rental Car Reservations
- Apartment Security
- Money Machines

1.0 GENERAL

No need to pay the premium for leased or dedicated phone lines. The **HOT-LINE DIALER** automatically dials the number to which it is programmed whenever the handset is picked up. The dialer will operate on any central office line along with your conventional phones. The **HOT-LINE DIALER** is line powered and has an internal lithium battery for memory back-up in case the K-1500-4 is removed from the telephone line for up to two years. Requires the PG-1 for programming.

2.0 PROGRAMMING

- 2.1 Install the programmer as shown on the right.
- 2.2 Install the dialer as shown in Paragraph 3.0. You must have a phone inserted and be on a telephone line to program.
- 2.3 Lift the receiver on the phone and enter any 1 to 15 digit number, just as if you were dialing a telephone. The dialer will dial the number as you enter it.
- 2.4 The number is now stored. If you wish to re-program, repeat steps 2.1 to 2.3
- 2.5 To increase dialing speed to 20 pulses/second insert a jumper between Pins 1 and 14 of the programming socket.


3.0 INSTALLATION

Remove the telephone cord from the RJ-11C and insert in the **HOT-LINE DIALER** jack. Insert the **HOT-LINE DIALER'S** one-foot cord into the RJ-11C as shown. The unit can be mounted with sticky-backed tape if required.

4.0 OPERATION

Each time a telephone connected to the dialer goes off hook, the **HOT-LINE DIALER** will automatically dial the programmed number.


PROGRAMMING

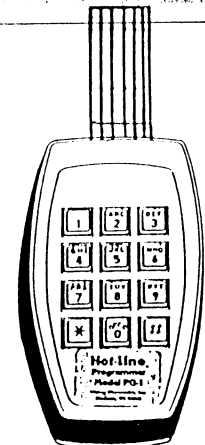


PG-1 Programmer

Product Support Hotline...(715) 386-8666

ONE NUMBER DIALER

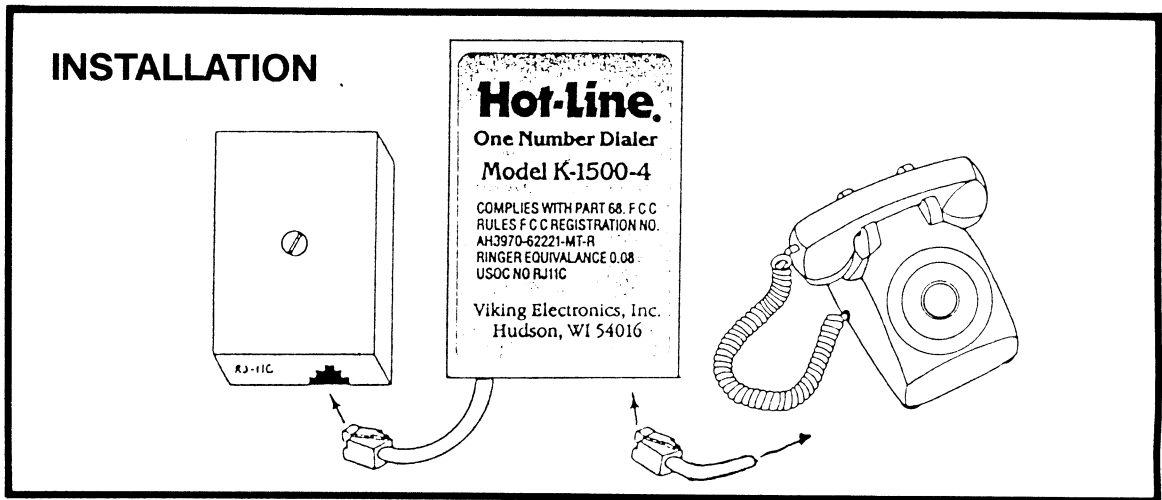

EMERGENCY AND ELEVATOR APPLICATION

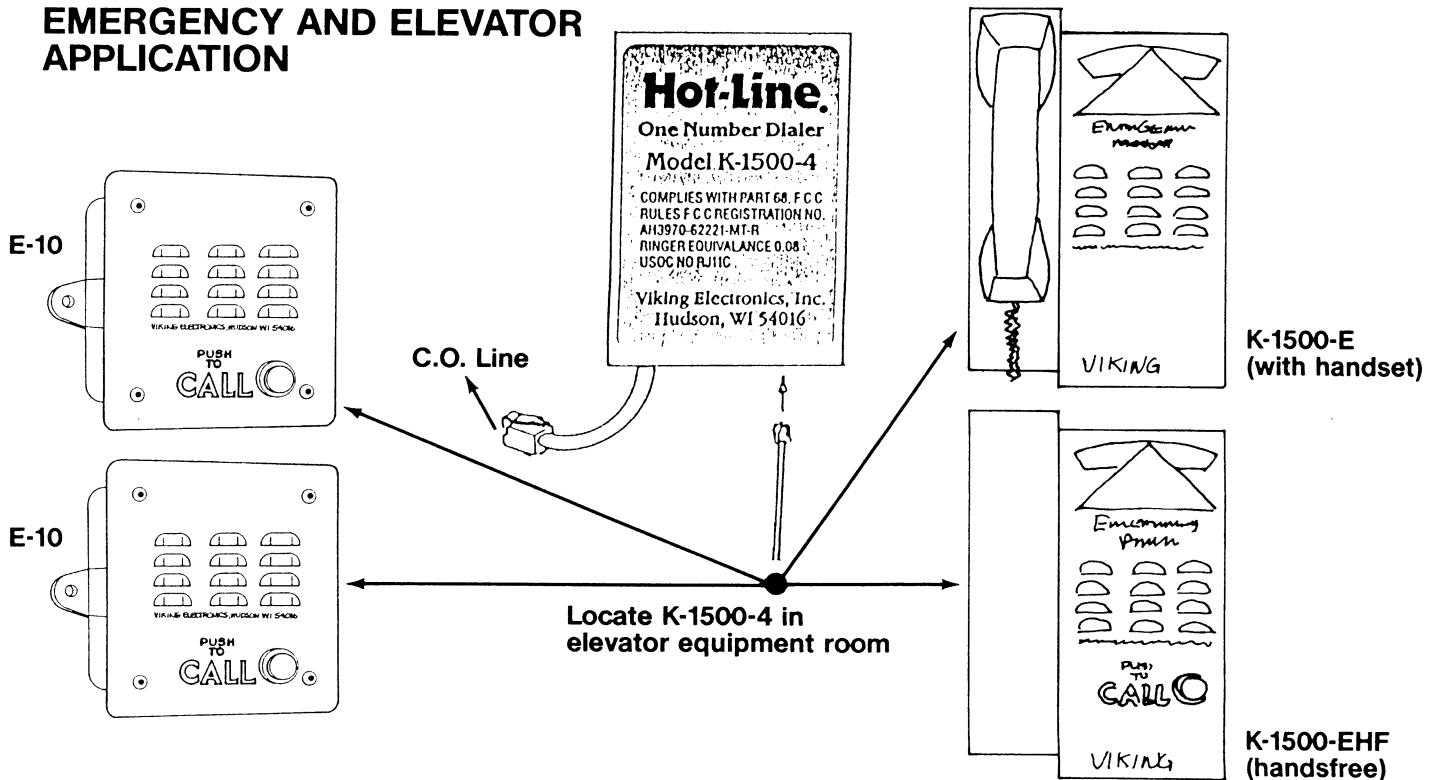

LIMITED ONE YEAR WARRANTY

If, at any time during the warranty period, the product is defective or malfunctions, Viking shall repair or replace it (at Viking's option) within a reasonable period of time. If the product is defective, package it carefully, along with proof of purchase (including date of purchase) along with \$5.00 for return postage and handling and a short description of the malfunction, and mail it, postage prepaid, to the following address:

Manager-Product Service, Viking Electronics, Inc., Post Office Box 448, 1531 Industrial Street, Hudson, WI 54016

This warranty does not cover any damage due to accident, misuse, abuse or negligence.

Viking's sole responsibility shall be to repair or replace the product within the terms stated above. **VIKING SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGE OF ANY KIND, INCLUDING ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING, DIRECTLY OR INDIRECTLY, FROM ANY BREACH OF ANY WARRANTY, EXPRESSED OR IMPLIED, OR FOR ANY OTHER FAILURE OF THIS PRODUCT.** Some states do not allow the exclusion or limitation of incidental or consequential damages, so this limitation may not apply to you.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY EXCLUDED BEYOND THE ONE YEAR DURATION OF THIS WARRANTY. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

This warranty gives you specific legal rights, and you may have other rights which vary from state to state. If you have any questions concerning this warranty, or the product, contact your dealer or write to us at the above address.